



# Tubes

Our tubes are used in a variety of applications or products, such as: automotive filters, aerospace filters and healthcare filters

## Product Features

### Heat-slit tubes


For injection molding, we offer our medical solutions in the form of one to two layered tubes or tube sections. With our hot and ultrasonic cutting technologies, we can create tubes down to a minimum diameter of 2.5 mm. Depending on the component and requirements, the tubes are equipped with one or two functional seams, which provide the necessary seam strength. Ultrasonic welded tubes have one overlapping weld and like in the ultrasonic slitter, the material passes over an anvil that emits a high frequency to bond the material together into a tube. Dual-layer slit tubes have two edges on the side of the tube. These edges or wings allow for the tube to be placed into a molding device and can be held on both sides of it. The individual cutting of the tubes results in the so-called Tubes Cuts, which are also available in conical form.

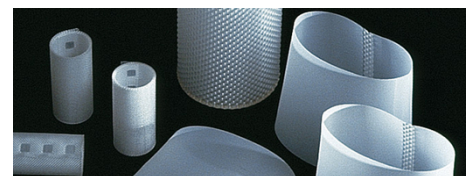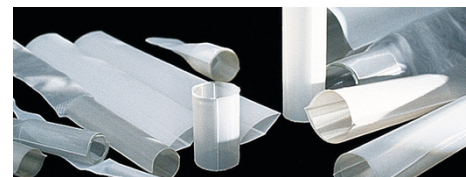

## DOWNLOADS

Technical List: Open Mesh Fabrics

## Product forms



## Referenzen

- All fabrics with thread diameters < 250 µm and mesh openings < 500 µm can be heat slit
- Heat-slit tubes are specified by having a defined inner diameter. Diameters range from 6 to 320 mm
- The inner diameter of the heat-slit tube does not equal the flat width of the tube itself. The effect of

### Sefar Inc.

111 Calumet Street  
Buffalo, NY 14043 – USA


Phone 800 995 0531

[sales.us@sefar.com](mailto:sales.us@sefar.com)

[Go to content](#)

- welded 'wings' on either side has to be taken into consideration. The width depends on the mesh type
- Ultrasonic flat-welded tubes 2 – 168 mm for fabrics up to 500  $\mu$

## Making-up



- Tubes are wound onto standard cores (polyester discs) which have an inner square hole of 30 x 30 mm and an outer diameter of 61 mm
- Upon request tubes can also be rolled onto ABS rings with a inner diameter of 76 mm (3").
- Depending on fabric type and tube dimensions, roll length of up to 500 m are possible.

## Packaging / labeling

- Tube rolls are packed into sealed PE bags

### Sefar Inc.

111 Calumet Street  
Buffalo, NY 14043 – USA

Phone 800 995 0531

[sales.us@sefar.com](mailto:sales.us@sefar.com)

[Go to content](#)




- Heat-slit tubes made of SEFAR MEDIFAB fabrics are double bagged
- The label contains the following information:  
manufacturer, material, dimensions (diameter in mm, length in m), manufacturing date, order number, roll number

## Ultrasonically welded tubes

Fabrics, single and multilayer, can be ultrasonically welded into tube configurations. Tubes are made with one overlapping ultrasonic weld. Welds are accurate, clean and are made without the introduction of secondary material to the weld.

## Product forms



- All fabrics having thread diameters  $< 250 \mu\text{m}$  and mesh openings  $< 500 \mu\text{m}$  can be ultrasonically welded
- Tube diameters range from 2 to 250 mm

### Sefar Inc.


111 Calumet Street  
Buffalo, NY 14043 – USA

Phone 800 995 0531

[sales.us@sefar.com](mailto:sales.us@sefar.com)

[Go to content](#)

## Making-up



- Tubes are wound onto standard cores
- Polyester discs have an inner square hole  
30 x 30 mm and an outer diameter of 61 mm
- Depending on fabric type and tube dimensions,  
roll length of up to 700 m are possible

## Packaging / labeling




- Tube rolls are packed into PE bags that are  
closed by welding
- The label contains the following information:  
manufacturer, material, dimensions (diameter  
in mm, length in m), manufacturing date,  
order number, roll number

## Tubes, cut to length

Tubes, cut to length, are segments cut from woven, ultrasonically welded or heat-slit tubes.

## Product forms



- Laser cutting provides heat-sealed, non-fraying edges.  
 Tube diameters range from 2 to 80 mm, lengths range from 10 to 500 mm.
- Cold cutting provides non-sealed edges that may fray.  
 Diameters range from 80 mm to 125 mm, lengths range from 10 to 1000 mm.

## Packaging / labeling

- Tube segments are packed into PE bags that are sealed



- by welding.
- Tube segments made of SEFAR MEDIFAB fabrics are double bagged.
- The label contains the following information:  
 manufacturer, material, dimensions  
 (diameter in mm, length in m), manufacturing date,  
 order number, roll number, number of pieces per bag.

## Your Benefits

- Non-fraying edges (laser cut)
- Customizable dimensions (variety of diameters)
- Suited for healthcare applications (SEFAR MEDIFAB, double bag)
- Traceability (label)
- Easy handling (various cores available)

For industry/application specific use of ribbons see links below:



### Sefar Inc.

111 Calumet Street  
Buffalo, NY 14043 – USA

Phone 800 995 0531

[sales.us@sefar.com](mailto:sales.us@sefar.com)

[Go to content](#)



For further information and fabric samples, please select the preferred contact option on the right.

## Locations



### Sefar BDH Inc.

200 rue Clement Gilbert  
Saguenay QC, G7H 5B1 – Canada  
Phone: +1 418 690 0888  
Fax: +1 418 690 9499

 [E-Mail](#)



### Sefar Inc.

Kansas City, MO – USA  
Phone: 800 995 0531  
Fax: +1 816 452 2183

 [E-Mail](#)



### Sefar Inc.

Los Angeles, CA – USA  
Phone: 800 995 0531  
Fax: +1 909 544 5901

 [E-Mail](#)

### Sefar Inc.

111 Calumet Street  
Buffalo, NY 14043 – USA

Phone 800 995 0531

[sales.us@sefar.com](mailto:sales.us@sefar.com)

[Go to content](#)



**Sefar Inc.**

Gray, GA – USA  
 Phone: 800 995 0531  
 Fax: +1 478 986 6953

■ **E-Mail**



**Sefar Inc.**

111 Calumet Street  
 Buffalo, NY 14043 – USA  
 Phone: 800 995 0531  
 Fax:

■ **E-Mail**